



## ATEX APPROVED LOW GAIN BASE STATION ANTENNA AV1463-EXnA-313FN2

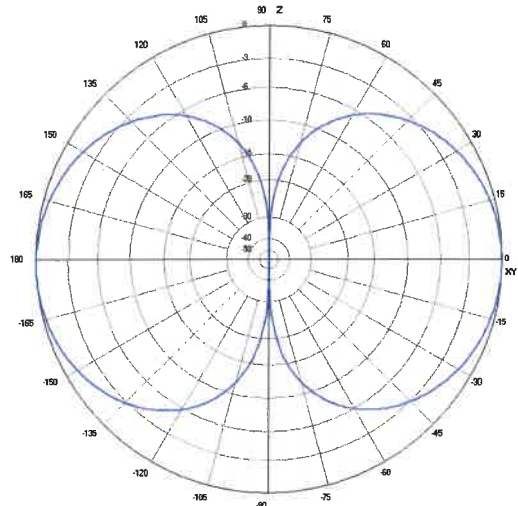

Type	AV1463-EXnA-313FN2
Frequency	225...400 MHz
Bandwidth	175 MHz
Impedance	50 $\Omega$ DC grounded
VSWR	1,5 typical
Polarisation	Vertical
Gain	2 dBi nominal in free space *) For other mounting configurations please contact Aerial Oy.
E-plane 3 dB beamwidth	70°
H-plane 3 dB beamwidth	-°
Electrical downtilt	None
Front to back ratio	- dB
Max. Continuous power	In non-ATEX environment: -500W CW, limited by input connector  In ATEX environment: -Group IIC: 2,0W (33,0dBm) -Group IIB: 3,5W (35,4dBm) -Group IIA: 6,0W (37,7dBm) -All three EIRP-power values
RF-connector	N-female on a 1000mm fixed jumper
Operational windspeed	40 m/s (default)
Survival windspeed	55 m/s (default)
Effective wind area ( $A_{eff}$ )	0,1 m <sup>2</sup>
Dimensions (H x W x D) ( $\varnothing$ x H)	518 x 479 mm
Weight	3,5 kg antenna only, no mounting kit.
Mounting diameter	$\varnothing$ 30...115 mm pipe standard mounting kit AETM160-6-A4
Materials	AISI304 AISI316 Glass reinforced PE
Options	Mounting kit and colour
Atex marking	 II 3G, Ex nA IIA/IIB/IIC T6 Gc
Ambient temperature	-45 °C $\leq$ Tamb $\leq$ +60 °C (Class T6)

\*) Limited and/or controlled when used in ATEX-environment. See related EC DECLARATION OF CONFORMITY ATEX Directive 94/9/EC, TYPE EXAMINATION CERTIFICATE, installation instruction and their attachments for more details, information and before installation and assembly.