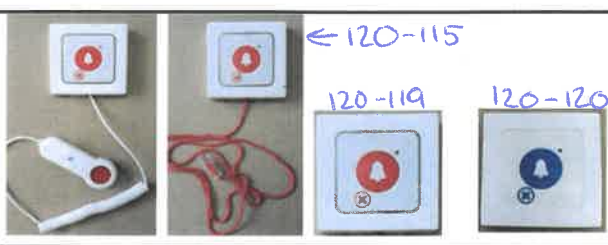


FST- GP2017CB Call button

120-114																									
Basic functions	<ul style="list-style-type: none"> ★ 2 KEYS, LED and beep indicator. ★ Handle type, line type ,normal type. ★ Inner POCSAG Encoder , Directly to pager. ★ Cheap battery, Support over 50000 times press. ★ 20DB Max, 300m in open air. ★ AAA battery 2 PCS, Low battery message reminder. ★ User named message display. Automatic delete finished work. ★ Flexible net building, 1 button to pagers or 1 key to pagers, easy No. setting. ★ ID setting alpha messaging and other settings 																								
Specification	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Frequency range TX</td><td style="width: 50%;">420-470 MHz</td></tr> <tr> <td>Frequency range RX</td><td>420-470 MHz</td></tr> <tr> <td>Modulation Type</td><td>FSK</td></tr> <tr> <td>Channel Spacing</td><td>12.5/25KHZ</td></tr> <tr> <td>Output Power</td><td>20DB max</td></tr> <tr> <td>Receiver sensitivity</td><td>-100DB</td></tr> <tr> <td>Harmonic Radiation</td><td>less - 25dBm</td></tr> <tr> <td>Frequency Stability</td><td>5PPM at -10°C~60°C</td></tr> <tr> <td>Current Consumption</td><td>100mA max (when transmitting)</td></tr> <tr> <td>Dimensions</td><td>L*W*H:86*86*16.5mm</td></tr> <tr> <td>Weight:</td><td>150g</td></tr> <tr> <td>Operating Temperature</td><td>-10o to 50o</td></tr> </table>	Frequency range TX	420-470 MHz	Frequency range RX	420-470 MHz	Modulation Type	FSK	Channel Spacing	12.5/25KHZ	Output Power	20DB max	Receiver sensitivity	-100DB	Harmonic Radiation	less - 25dBm	Frequency Stability	5PPM at -10°C~60°C	Current Consumption	100mA max (when transmitting)	Dimensions	L*W*H:86*86*16.5mm	Weight:	150g	Operating Temperature	-10o to 50o
Frequency range TX	420-470 MHz																								
Frequency range RX	420-470 MHz																								
Modulation Type	FSK																								
Channel Spacing	12.5/25KHZ																								
Output Power	20DB max																								
Receiver sensitivity	-100DB																								
Harmonic Radiation	less - 25dBm																								
Frequency Stability	5PPM at -10°C~60°C																								
Current Consumption	100mA max (when transmitting)																								
Dimensions	L*W*H:86*86*16.5mm																								
Weight:	150g																								
Operating Temperature	-10o to 50o																								