


FST- GP2017CB Call button

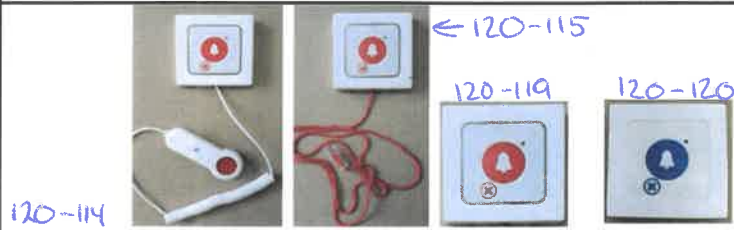

Basic functions	★ 2 KEYS, LED and beep indicator.	
	★ Handle type, line type ,normal type.	
	★ Inner POCSAG Encoder , Directly to pager.	
	★ Cheap battery, Support over 50000 times press.	
	★ 20DB Max, 300m in open air.	
	★ AAA battery 2 PCS, Low battery message reminder.	
	★ User named message display. Automatic delete finished work.	
	★ Flexible net building, 1 button to pagers or 1 key to pagers, easy No. setting.	
★ ID setting alpha messaging and other settings		
Specification	Frequency range TX	420-470 MHz
	Frequency range RX	420-470 MHz
	Modulation Type	FSK
	Channel Spacing	12.5/25KHZ
	Output Power	20DB max
	Receiver sensitivity	-100DB
	Harmonic Radiation	less - 25dBm
	Frequency Stability	5PPM at -10°C~60°C
	Current Consumption	100mA max (when transmitting)
	Dimensions	L*W*H:86*86*16.5mm
	Weight:	150g
	Operating Temperature	-10o to 50o