


FST- GP2017CB Call button

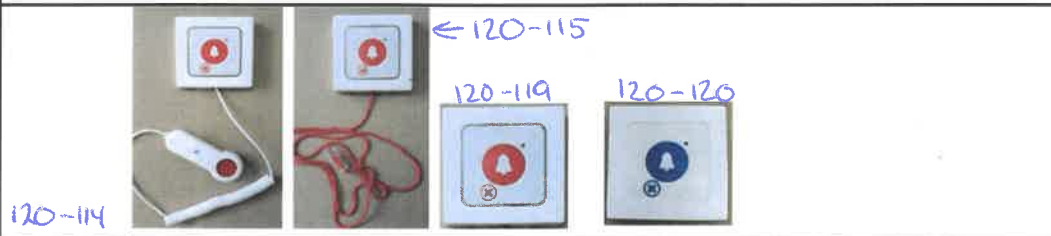

- Basic functions**
- ★ 2 KEYS, LED and beep indicator.
 - ★ Handle type, line type ,normal type.
 - ★ Inner POCSAG Encoder , Directly to pager.
 - ★ Cheap battery, Support over 50000 times press.
 - ★ 20DB Max, 300m in open air.
 - ★ AAA battery 2 PCS, Low battery message reminder.
 - ★ User named message display. Automatic delete finished work.
 - ★ Flexible net building, 1 button to pagers or 1 key to pagers, easy No. setting.
 - ★ ID setting alpha messaging and other settings

Specification

Frequency range TX	420-470 MHz
Frequency range RX	420-470 MHz
Modulation Type	FSK
Channel Spacing	12.5/25KHZ
Output Power	20DB max
Receiver sensitivity	-100DB
Harmonic Radiation	less - 25dBm
Frequency Stability	5PPM at -10°C~60°C
Current Consumption	100mA max (when transmitting)
Dimensions	L*W*H:86*86*16.5mm
Weight:	150g
Operating Temperature	-10o to 50o