

SX-MOUNT (M5/M6)

Mobile roof, trunk and wing mount

Strong and reliable universal mount for roof, trunk and wing mounting. It can be mounted from the inside as well as from the outside. It accepts antenna whips with external M5 threaded stud or with internal M6 thread (by use of the supplied M5/M6 threaded adapter)

- UNIVERSAL MOUNTING
- TILTABLE IN ALL DIRECTIONS



Electrical Specifications:

Frequency 0 - 1000 MHz

Impedance 50 ohm

Mechanical Specifications:

Color Black

Diameter 45 mm

Mounting Bolt-on (From inside or outside)

Materials PC, PE, brass and steel

Operating temperature -40C to +70C

Connector 1 See "ORDERING INFO" (Other types available)

Cable See "ORDERING INFO" (Other lengths available)

Mounting place On vehicle roof, trunk or wing

Height above roof 46 mm

Mounting hole Mounted from inside: Ø 13 mm, Mounting from outside: Ø 19 mm

Build-in depth Approx. 12 mm

Ingress Protection IP65 (When mounted)



Ordering information:


Part no.	46500 (0.1 m cable + FME-male)
Part no.	46500IP (0.1 m cable + FME-male - Bulk packing)
Part no.	46504 (4 m cable + open end)
Part no.	46504IP (4 m cable + open end - Bulk packing)
Part no.	46505 (5 m cable + open end)
Part no.	46505IP (4 m cable + open end - Bulk packing)
Part no.	46510 (5 m cable + FME-female + BNC-male adapter)
Part no.	46510IP (5 m cable + FME-female + BNC-male adapter)
Part no.	46515 (5 m cable + FME-female)
Part no.	46515IP (5 m cable + FME-female - Bulk packing)

Packing information:

Packing	Polybag or bulk
---------	-----------------



Outline Drawing

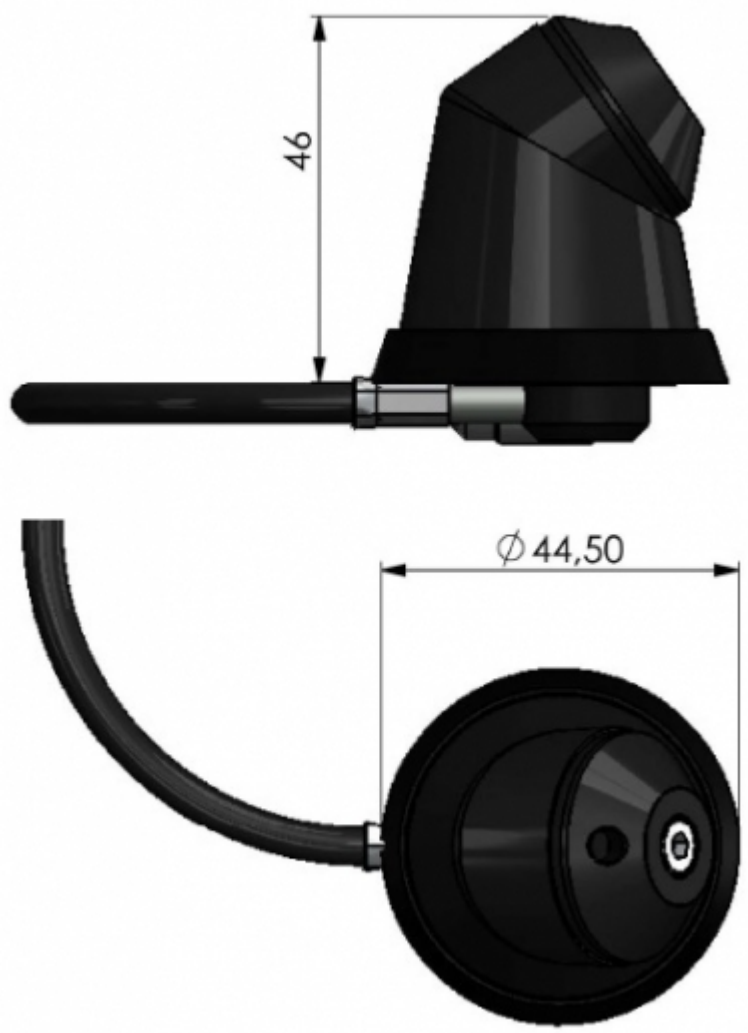

SX-Mount Instruction

MOUNTING INSTRUCTION

