GPSD-6-60[-VAR]





- OEM style sharkfin with 2x2 MiMo for 4G/5G
- GPS/GNSS and optional up to 4x MiMo WiFi
- Support for external whip •

The GPSD 'Sharkee' range has become a byword for industry leading technology in a discrete OEM style shark fin housing. The GPSD-6-60 brings 5G capability to the GPSD family.

The antenna should be installed on a metal panel when a comms whip is used, but if whip is not required, then it may be fitted on a non-metallic panel and still offer similar performance.

The shark fin housing contains a 2x2 MiMo antenna function for 4G/5G (617-960/1710-6000MHz) and option of 2x2, 3x3 or 4x4 MiMo dual band WiFi, which supports WiFi 6. An active antenna for GPS/GLONASS/Galileo/ BeiDou is included, with 26dB gain LNA and advanced filtering for LTE Band 13/14 operation. In addition, there is an integral stud mount for an external antenna whip that can support a range of VHF, UHF or 700/800MHz antennas. A blanking cap is supplied for when this is not required.

The GPSD shark fin design provides multiple antenna functions while remaining discreet and is suitable for public safety (overt/covert), industrial and transport applications where a cost effective, efficient and robust antenna is essential. Requiring only a single hole mounting, the GPSD reduces vehicle damage, installation time & cost and visual impact whilst protecting a vehicle's resale value.

Technical Drawing

HOUSING: SEE TABLE M6 x 0.75 BOSS UNDER BLANKING CAP BLANKING CAP-90mm 87mm ON INSTALLATION φŴ PRODUCT LABEL 40 HSS 120 ±10 CABLE SLEEVE MAX. PANEL THICKNESS FLEXIBLE TPE SEALING M18 x 1 STAINLESS 5.0 ADHESIVE PAD STEEL MOUNTING BUSH SKIRT PADS (x4) ON UNDERSIDE CELL CABLES - SMA PLUG TERMINATION. CABLES LABELLED - CELL A/ CELL B. 0 SHAKEPROOF × Br YELLOW LABEL WITH BLACK TEXT WASHER 4.0 WHIP CABLE - FME PLUG TERMINATION. STEEL SLOTTED III (DA) NUT CABLE LABELLED - WHIP. WHITE GREEN LABEL WITH BLACK TEXT CELL = SMA-Male FLAME GPS/GNSS CABLE - FME JACK TERMINATION. CABLE LABELLED -RETARDANT GPS/GNSS = FME-Female RG174 CABLE, 300mm LONG GPS/GNSS. WHITE LABEL WITH BLACK TEXT WiFi = SMA-Female 8 POSITIONS WIFI CABLES - SMA JACK TERMINATION 238mm TETRA pisk = FME-Male CABLES LABELLED - WIFI 1/ WIFI 2/ WIFI 3/ 68mm,ON INSTALLATION 243mm ON INSTALLATION WIFI 4. RED LABEL WITH WHITE TEXT OPERATING FREQUENCIES CELL A: 615-960/1710-6000 MHz CELL B: 615-960/1710-6000 MHz WIFI 1: 2400-2485 / 4900-6000 MHz WIFI 2: 2400-2485 / 4900-6000 MHz WIFI 3: 2400-2485 / 4900-6000 MHz WIFI 4: 2400-2485 / 4900-6000 MHz GPS/GNSS: 1562-1612 MHz 26dB LNA 635. 633

GPSD-6-60-QW Shown

GPSD-6-60[-VAR]

PANORAMA 💬 ANTENNAS


Product Data

		GPSD-6-60-QW	GPSD-6-60-TW	GPSD-6-60-DW	GPSD-6-60	
Electrical Data						
	Element 1		1562-	1612		
Frequency Range (MHz) Peak gain: Isotropic*	Elements 2 & 3	2x 617-960, 1710-6000				
	Elements 4, 5 6 & 7	4 x 2.4/5.0/7.1GHz	3 x 2.4/5.0/7.1GHz	2 x 2.4/5.0/7.1GHz	-	
	Whip	1 X 2. 10.011.10112				
	winp	Dependent on selected whip 5dBi (617-960MHz)				
	Elements 2 & 3	8dBi (1710-3800MHz)				
	Liements 2 & 5	9dBi (4900-6000MHz)				
			x	,		
	Elements 4, 5, 6 & 7	5dBi (2396-2485MHz)	5dBi (2396-2485MHz)	5dBi (2396-2485MHz)	-	
	10/50	11dBi (4900-7200MHz) 11dBi (4900-7200MHz) 11dBi (4900-7200MHz) >12dB				
Isolation**	4G/5G					
	WiFi	> 15dB	> 15dB	> 15dB	-	
Typical Efficiency* W/o Cable	Elements 2 & 3	>	> 40% (617-698Mz) >60% (698-960/1710-6000MHz)			
Correlation Co-efficient	Elements 2 & 3	<0.2				
Polarisation		Vertical				
Pattern		Omni-directional				
mpedance		50Ω				
Max Input Power (W)		Internal elements 10W / main whip 60W				
GPS/GNSS Data						
Frequency Range (MHz)			1562-	1612		
/SWR		<2:1 ± 4MHz				
Gain: LNA		26dB				
Polarisation		Right Hand Circular				
Dut of Band Rejection		>40dB (+/- 100MHz f) Notch Filter @787MHz - 23dB 3-5V DC (fed via coax)				
Operating Voltage		Typical <20mA				
Current			i ypical •	<20IIIA		
Mechanical Data	Tatal Haisht (and mhin)		00.(2	F 4 ")		
~	Total Height (excl whip)	90 (3.54")				
Dimensions (mm) - Installed	Length	243 (9.56") 62 (2.49")				
	Width	63 (2.48")				
Dperating Temp (°C)		-40° / +80°C (-40° / 176°F)				
Vlaterial		ASA, Silicone Rubber, Aluminium Alloy				
Colour			Bla	ck		
Weight (g)						
Ingress Protection			IP6	6		
Mounting Info						
Fixing		Panel Mount				
Hole Size (mm)	_		19 (3	/4")		
Cable Data						
Cable Type - All Feeds		FR RG174 (UN ECE R 118 Compliant)				
Dimensions (mm) Termination	Diameter	2.8 (0.11")				
	Length	300 mm (12")				
	Whip	FME (m)				
	GPS/GNSS	FME (f)				
	4G/5G		2 x SM/	A plug		
	WiFi	4x SMA (f)	3x SMA (f)	2x SMA (f)	-	
		GPSD-6-60LVAR108	/03/2020 \/4	Waiver: The data giv performance of th conditions and does not imply a guara	ven above is indicative of ne product/s under parti ntee of performance. T	

GPSD-6-60[-VAR] 08/03/2020 V4 Page 2 conditions and does not imply a guarantee of performance of the product's under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.

GPSD-6-60[-VAR]


PANORAMA 💬 ANTENNAS

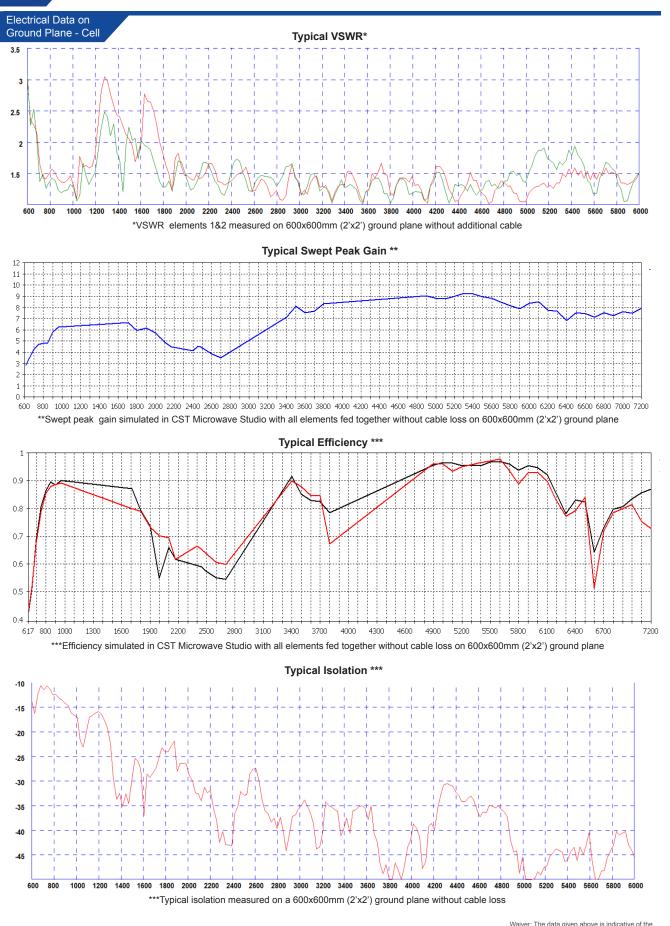

GPSD-6-60[-VAR] 08/03/2020 V4


Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved. 4G/5G Sharkfin MiMo Antenna GPSD-6-60[-VAR]

PANORAMA 🕐 ANTENNAS

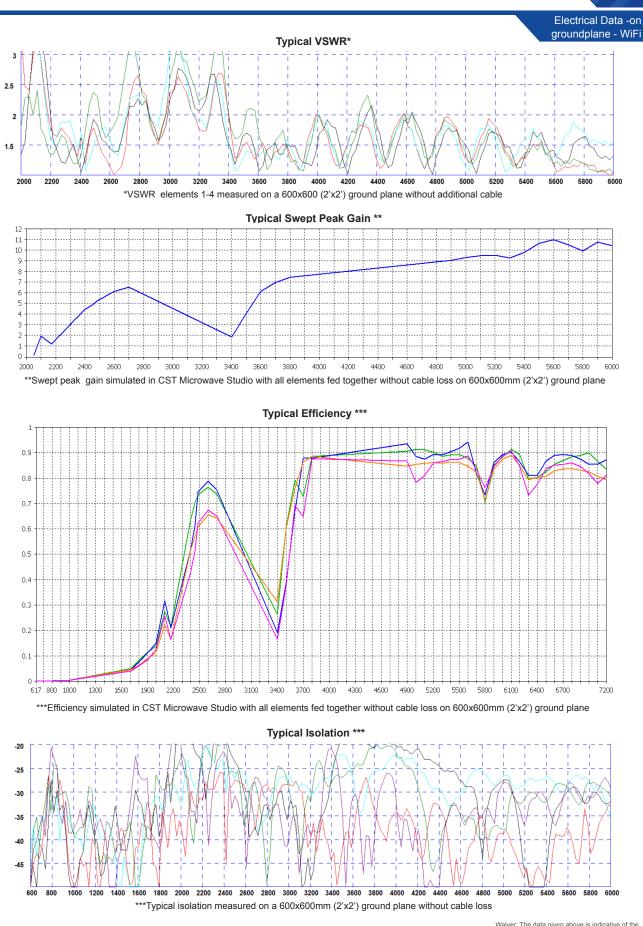

GPSD-6-60[-VAR]


PANORAMA 💬 ANTENNAS

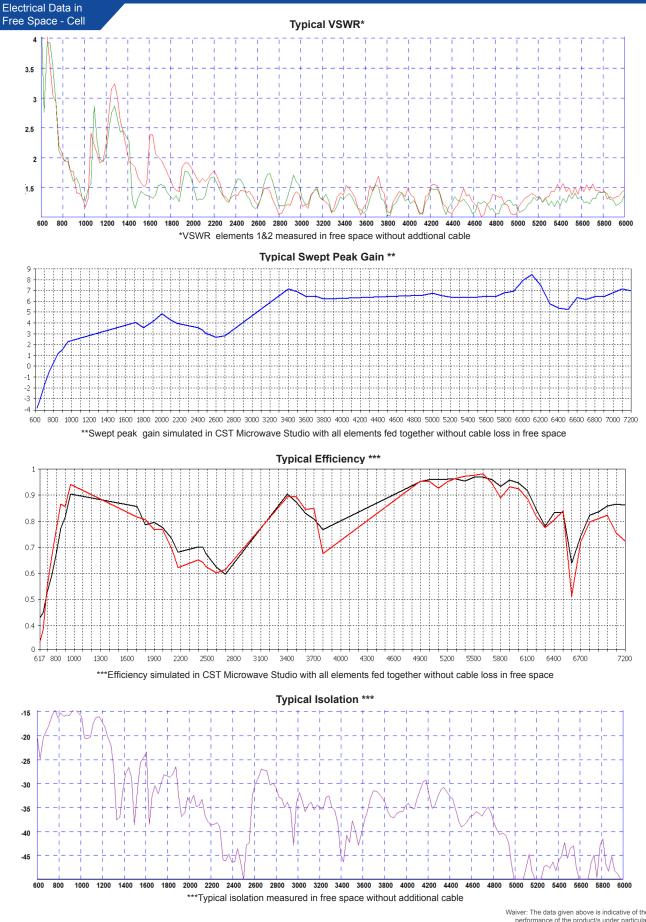

GPSD-6-60[-VAR] 08/03/2020 V4

GPSD-6-60[-VAR]


4G/5G Sharkfin MiMo Antenna

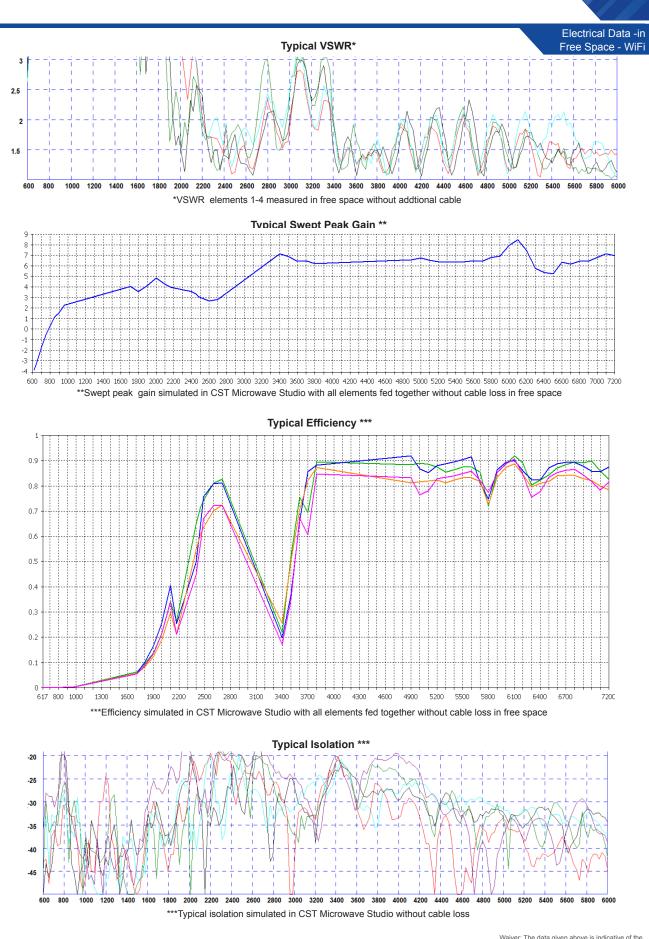

GPSD-6-60[-VAR]

PANORAMA 💬 ANTENNAS


3D Patterns on

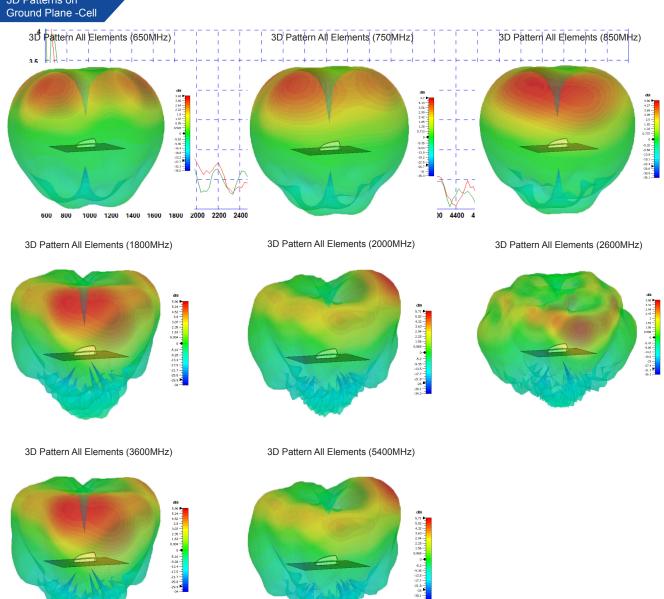


3D Patterns on Ground Plane -WIFI

3D Pattern All WiFi Elements (2450MHz)

3D Pattern All WiFi Elements (5400MHz)



3D Pattern All WiFi Elements (7100MHz)



3D patterns all simulated in CST Microwave Studio with all elements of same type fed together excluding cable loss

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.

GPSD-6-60[-VAR] 08/03/2020 V4

3D Pattern All Elements (650MHz)

GPSD-6-60[-VAR]


PANORAMA 💬 ANTENNAS


Electrical Data -in Free Space - Cell

1.15 1.01 0.060 0.729 0.451 0.312 0.312 0.312 0.451 0.312 0.451 0.45


3D Pattern All Elements (850MHz)

3D Pattern All Elements (2600MHz)

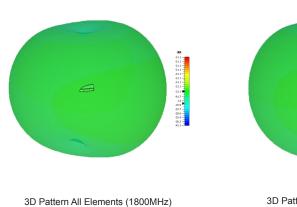




3D Pattern All Elements (3600MHz)






3D Pattern All Elements (750MHz)


3D Pattern All Elements (2000MHz)




3D Pattern All Elements (5400MHz)



3D Pattern All WiFi Elements (2450MHz)




3D Pattern All WiFi Elements (5400MHz)



3D patterns all simulated in CST Microwave Studio with all elements of same type fed together excluding cable loss

Electrical Data -in Free Space - WiFi

3D Pattern All WiFi Elements (7100MHz)



GPSD-6-60[-VAR] 08/03/2020 V4

Page 8

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.