

## G135-300F 0 dB RIGID (M5)

### Rigid spring loaded full $1/4 \lambda$ customer tunable antenna whip

Rigid spring loaded customer tunable antenna whip especially made for use with "G"-type mounts (bases) on vehicle roof etc.

- CUSTOMER TUNABLE (BY CUTTING)
- CUTTING TABLE FOR TUNING SUPPLIED

#### Electrical Specifications:

Frequency	135 - 300 MHz (2M-BAND, PMR)
Impedance	50 ohm
Polarisation	Vertical
Gain	0 dBd, 2.1 dBi
Bandwidth	15 MHz
VSWR	< 2.0
Max. Power	200 W

#### Mechanical Specifications:


Color	Black
Height	Approx. 700 mm (Before cutting)
Weight	90 g
Mounting	On "G"-type mounts
Materials	Stainless steel, PE and brass
Operating temperature	-40C to +70C
Connector 1	M5 threaded stud
Mounting place	Vehicle roof
Mounting Instruction	Antenna must be cut to specified frequency. Cutting Table included

#### Ordering information:

Part no.	G12051
Part no.	G12051IP (Bulk packing)

#### Packing information:

Packing	Polybag or bulk
---------	-----------------

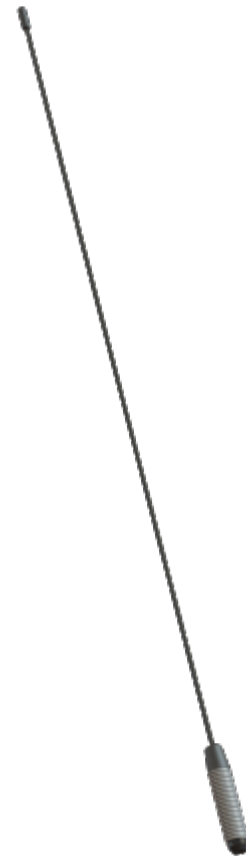

Outline Drawing

