


Cable	RG316/U
OD	$\phi 2.6 \pm 0.2 \text{mm}$
Cover	Black
SMB F RA	Gold

Frequency	174~237MHz
Gain	0dB
V.S.W.R	2.5:1
Impedance	50 Ω

ROHS

ISO 9001
ISO 14001

SMB M F PIN RA

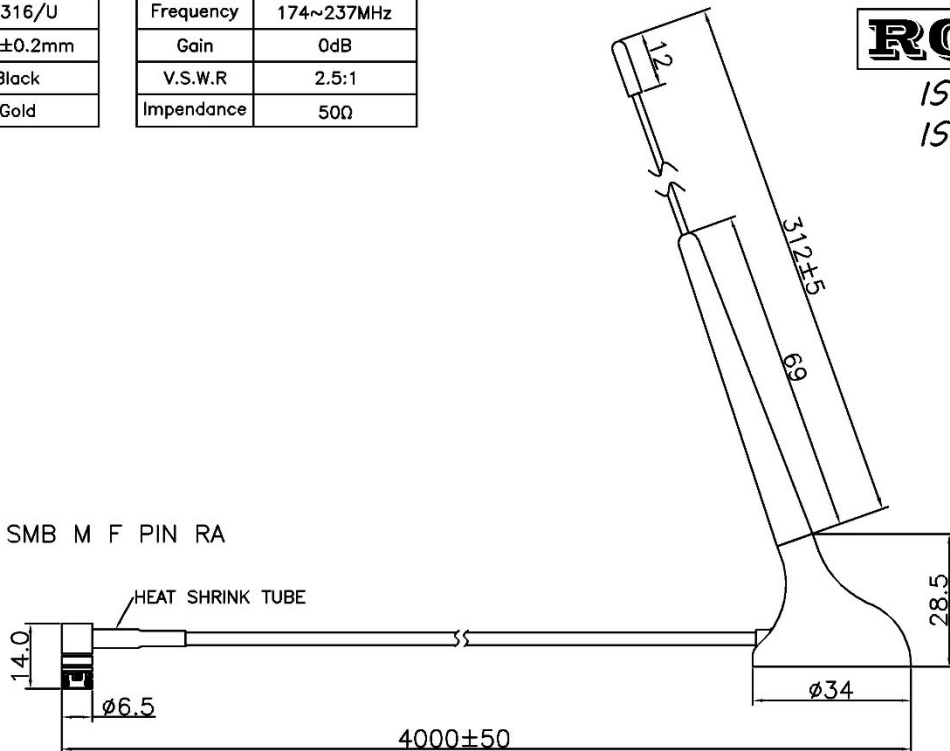

Material:			Treatment:		TRANSVOICE			
Drawer	Design	Aprov	Tolerance	Unit: mm		TITLE	202-867	
			X=±0.5	Ver: A	Scale 1:1	Model NO		
			.X=±0.2	File NO: QR0402	Drawing NO	100-27001-0208		
			.XX=±0.1					
			.XXX=±0.05					

NO	DESCRIPTION	MATERIAL / FINISH	Q'TY
Part NO			