


Cable	RG316/U	Frequency	824~894MHz
OD	∅2.7±0.15mm	V.S.W.R	2.0:1
Cover	Black	Impedance	50Ω
RP SMB M RA	Gold	Gain	5dB

ROHS

ISO 9001
ISO 14001

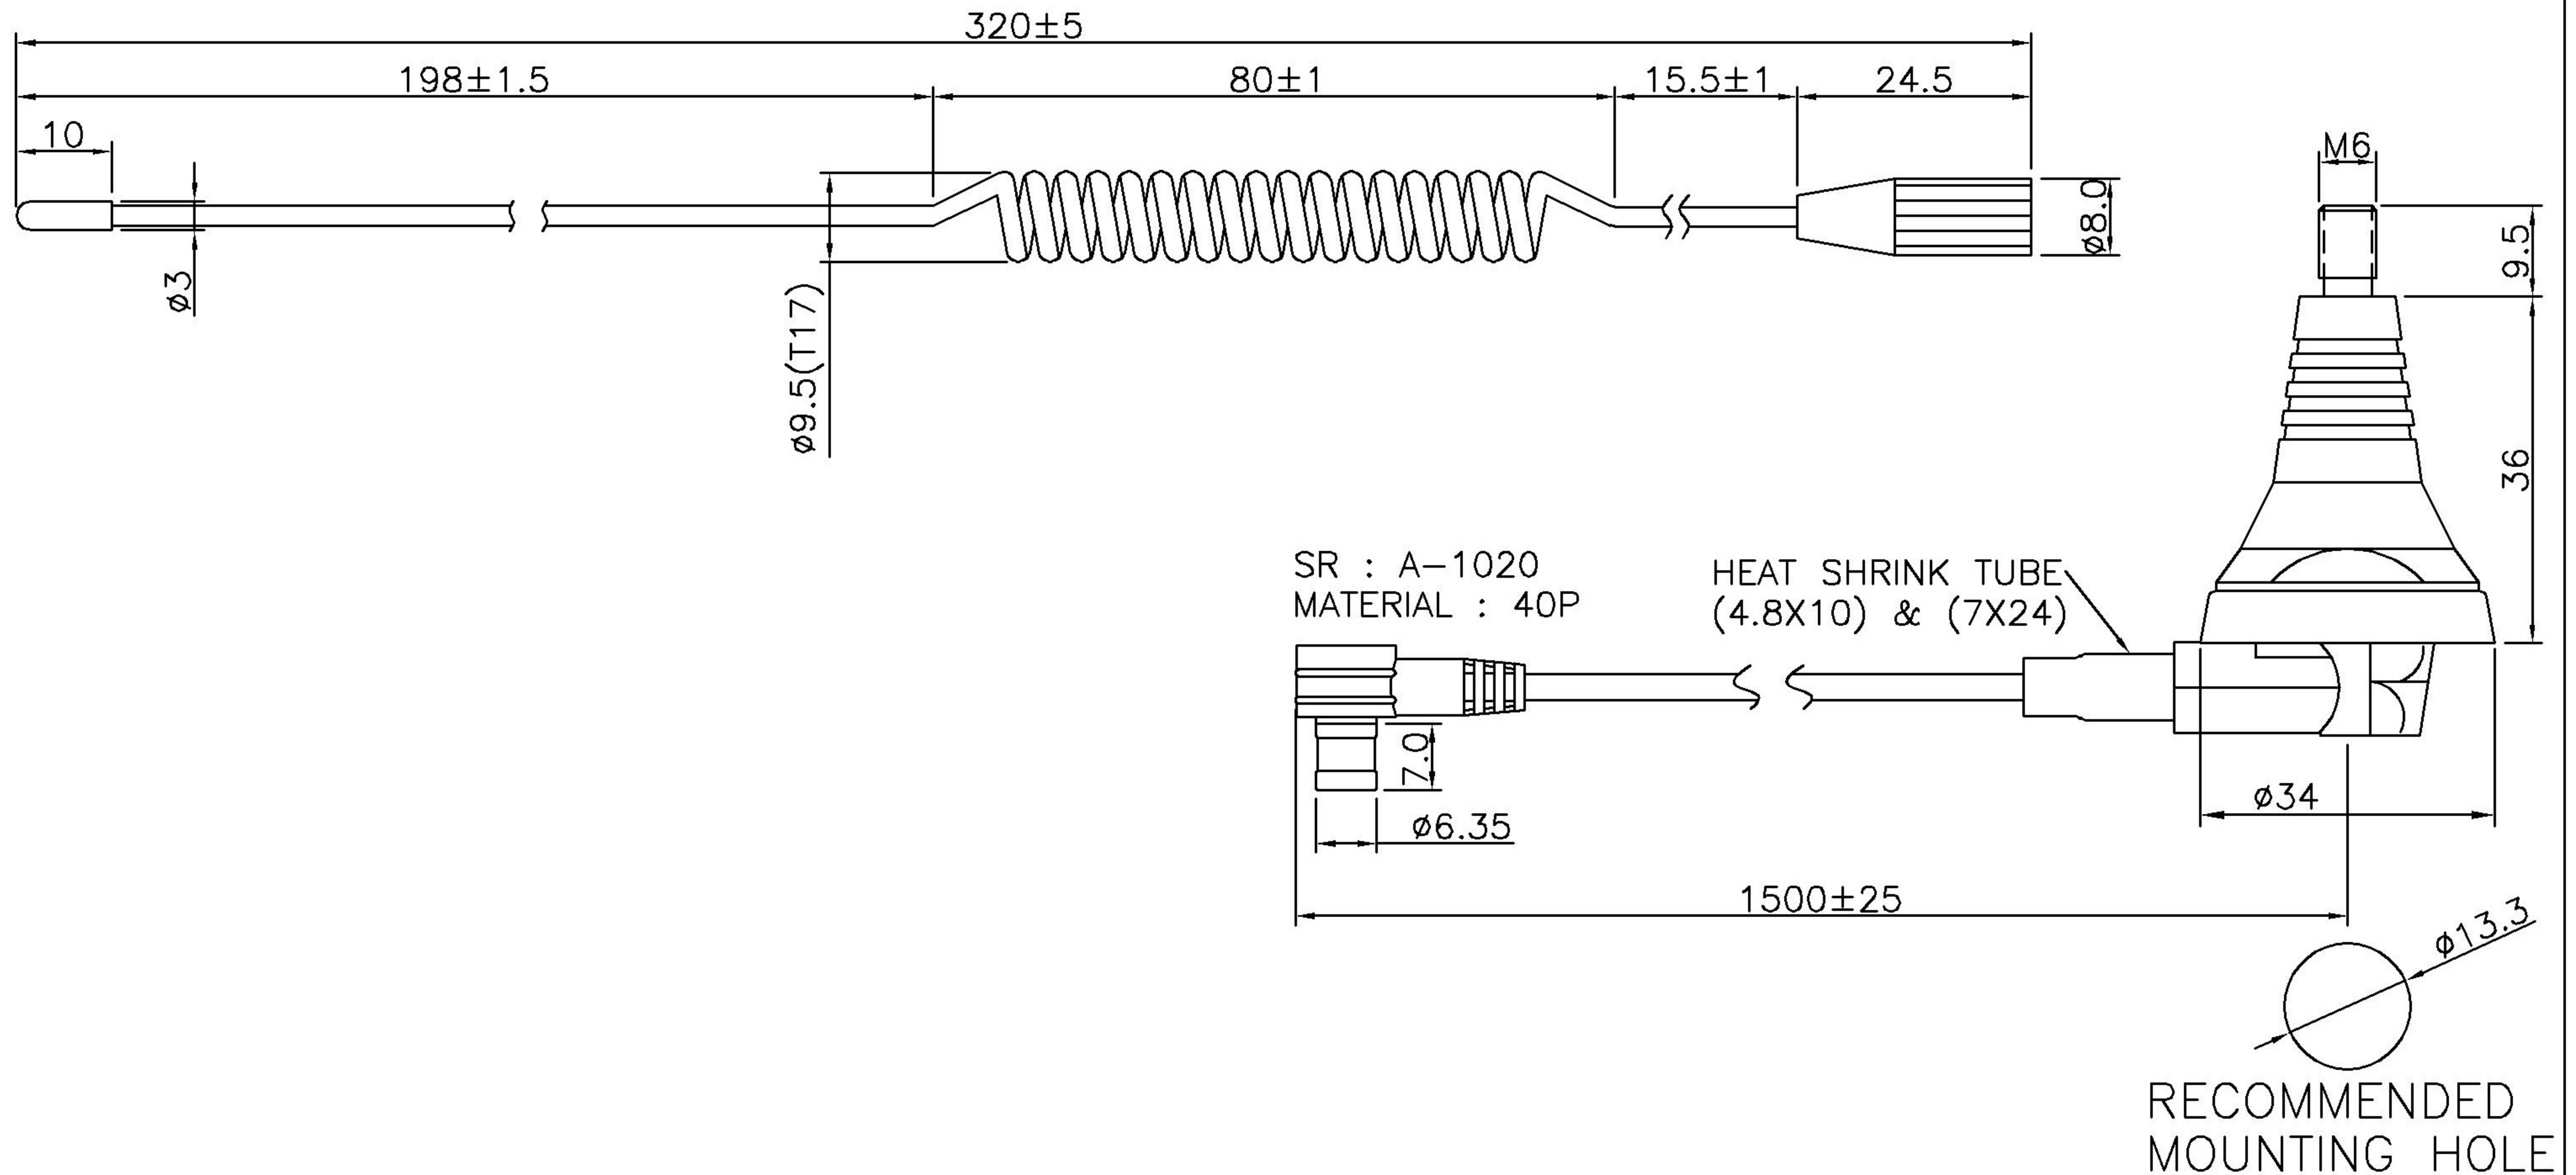

Material:				Treatment:		TRANSVOICE					
NO	DESCRIPTION	MATERIAL / FINISH	Q"TY	Drawer	Design	Aprov	Tolerance	Unit: mm		TITLE	202-879
							X=±0.5 .X=±0.2 .XX=±0.1 .XXX=±0.05	Ver: B	Scale 1:1	Model NO	
Part NO 202-879								File NO: QR0402		Drawing NO	100-27001-010