


|          |            |
|----------|------------|
| Cable    | RG316/U    |
| OD       | ø2.6±0.1mm |
| Cover    | Black      |
| MCX M RA | Gold       |

|           |              |
|-----------|--------------|
| Frequency | 698~960MHz   |
|           | 1710~2170MHz |
|           | 2300~2700MHz |
| Impedance | 50Ω          |
| V.S.W.R   | 3.2:1        |
| Gain      | 0~3dB        |

**ROHS**

ISO 9001  
ISO 14001

Cable : VW-1/13 mesh  
Low temperature resistance

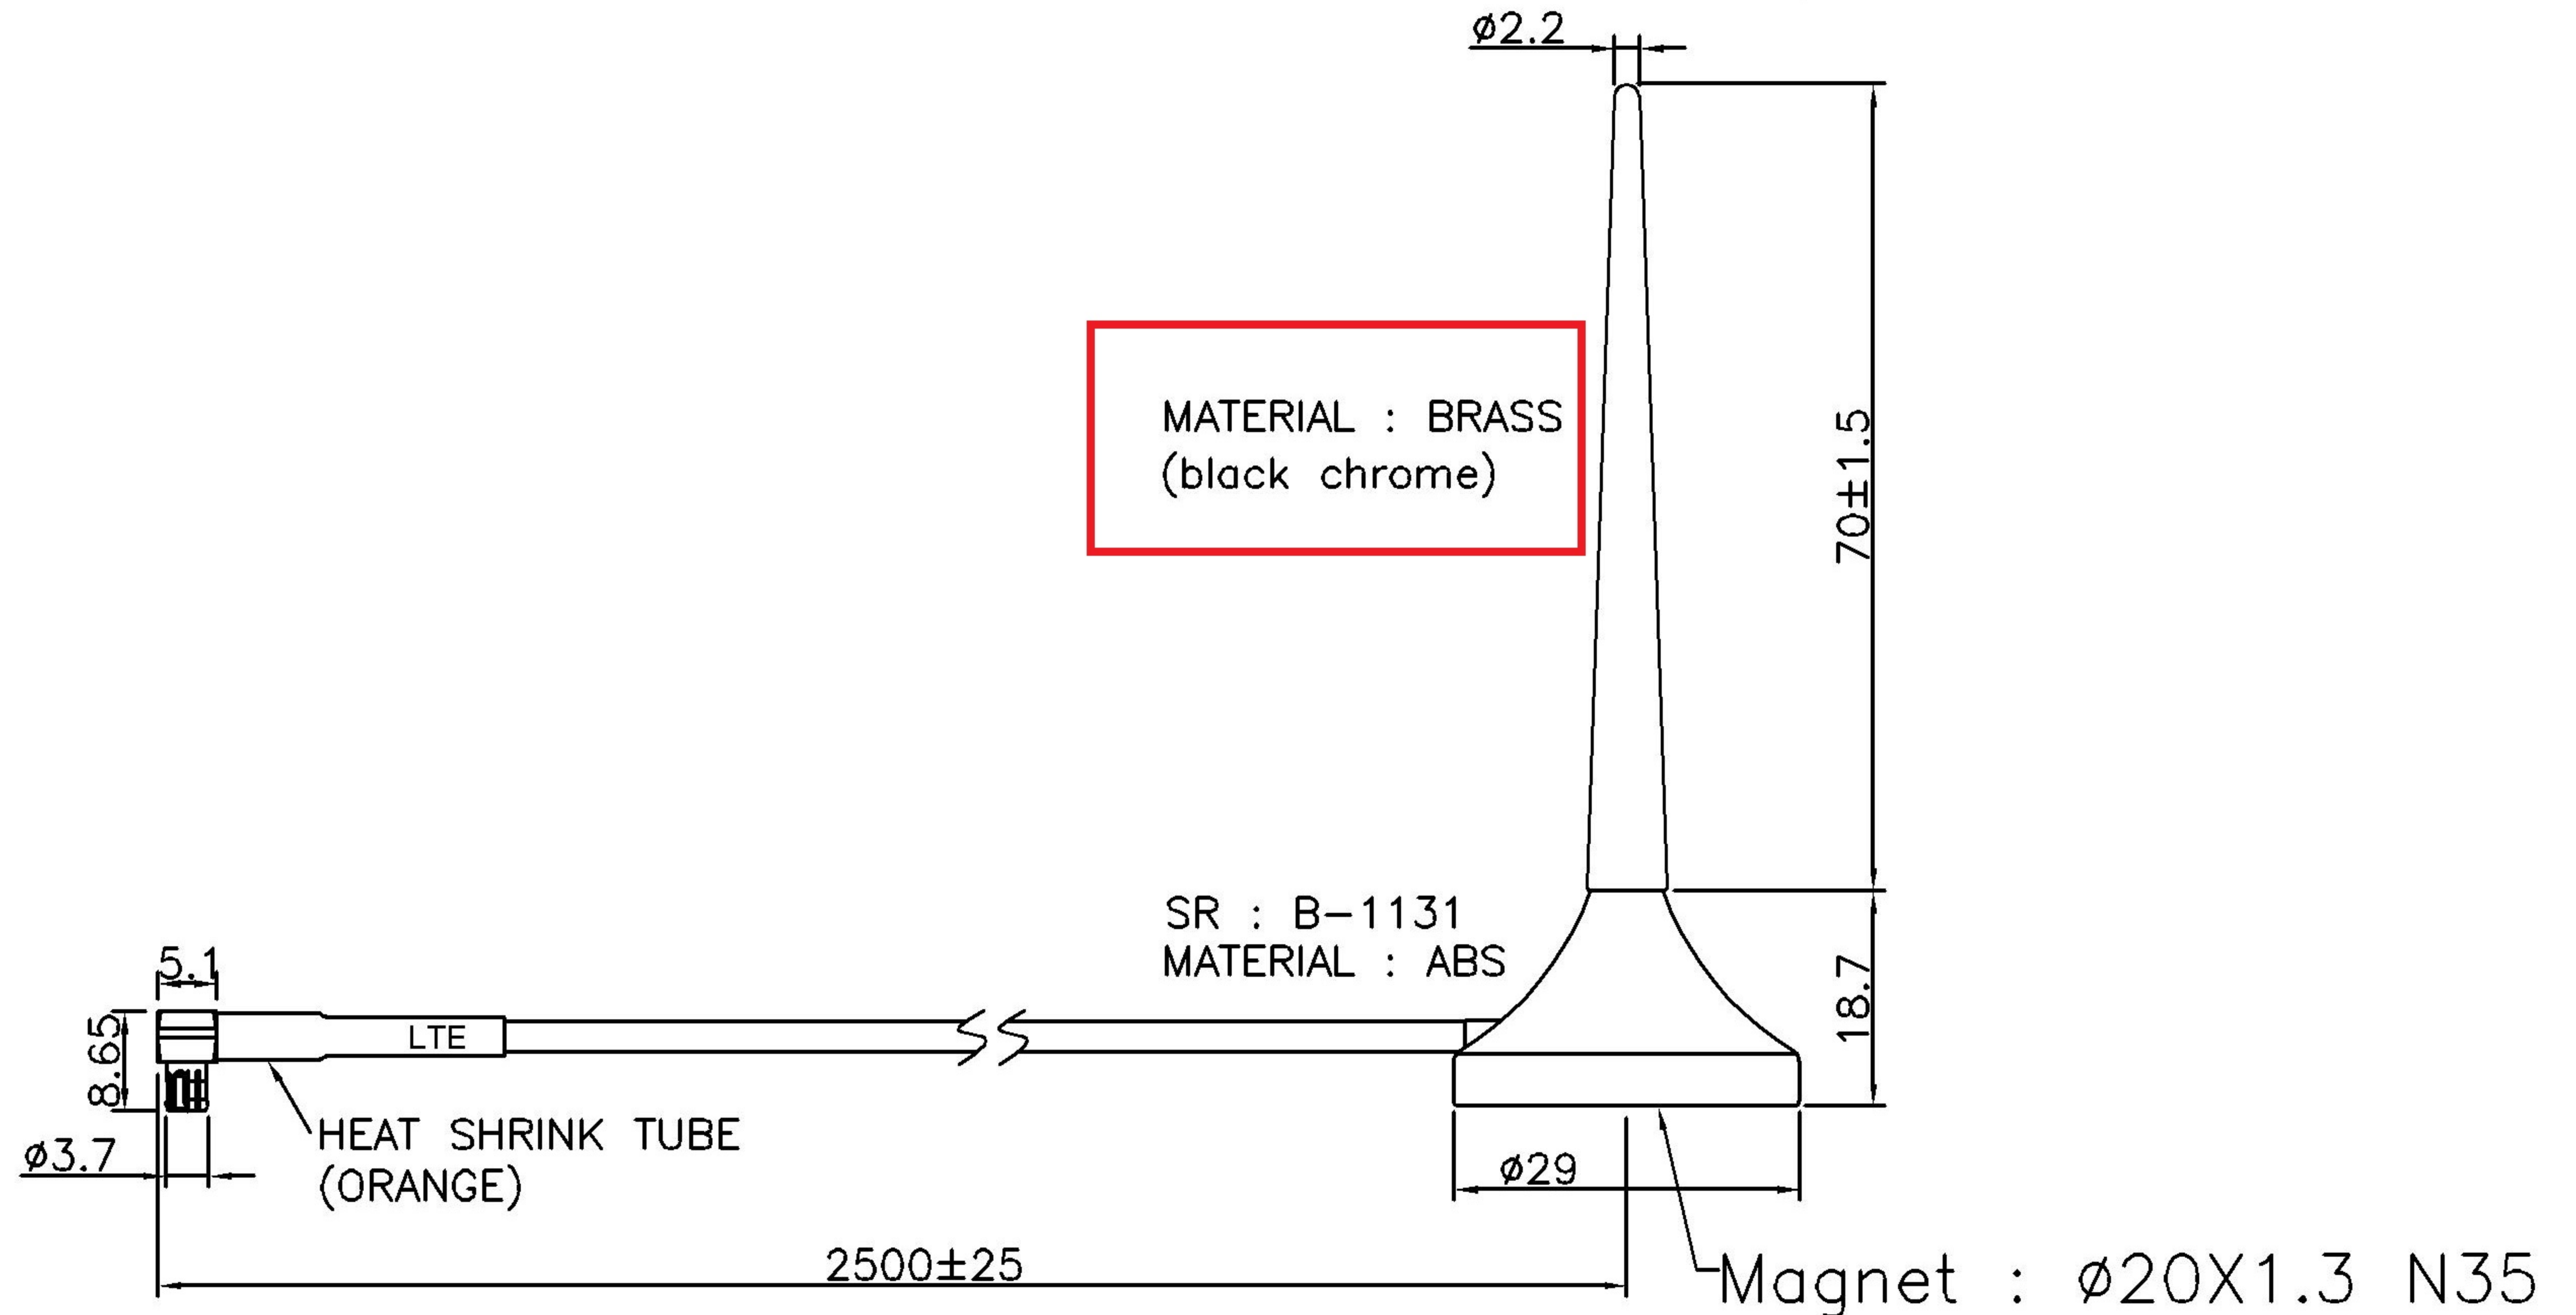

|           |             |                   |   |                 |            |                |                              |
|-----------|-------------|-------------------|---|-----------------|------------|----------------|------------------------------|
| Material: |             | Treatment:        |   | TRANSVOICE      |            |                |                              |
| Drawer    | Design      | Aprov             | Tolerance                                   | Unit: mm        |            | TITLE          | C05+MT44-2+316U+<br>MCX M RA |
|           |             |                   | X=±0.5<br>.X=±0.2<br>.XX=±0.1<br>.XXX=±0.05 | Ver: A          | Scale 1:1  | Model NO       |                              |
| NO        | DESCRIPTION | MATERIAL / FINISH | Q'TY  | File NO: QR0402 | Drawing NO | 100-27001-0253 |                              |
| Part NO   |             |                   |   |                 |            |                |                              |