

## MINI-PT-QUAD 1/4 (SMA-RA)

### Semi-flexible full $1/4 \lambda$ multiband whip antenna with SMA right angle connector

Semi-flexible full  $1/4 \lambda$  multiband whip antenna with integrated SMA-male right angle connector, especially made for portable and stationary wireless applications (M2M) in the GSM850/900/1800/1900 and DECT systems



#### Electrical Specifications:

Frequency	824 - 894 MHz, 890 - 960 MHz, 1710 - 1880 MHz, 1850 - 1990 MHz (GSM850/900/1800/1900/DECT)
Bandwidth	See "FREQUENCY"
Impedance	50 ohm
VSWR	< 2.0 @ f.res.
Polarisation	Vertical
Gain	0 dBd, 2.1 dBi
Max. Input Power	10/5 W

#### Mechanical Specifications:

Color	Black
Height	55 mm
Weight	10 g
Mounting place	On modems etc.
Materials	PE, copper, brass and Teflon
Connector	SMA-male (Right angle)

#### Ordering information:


P/N	14920
P/N	14920IP (Bulk-packing)

#### Packaging Information:

Type	Bulk or Polybag
------	-----------------



Outline Drawing

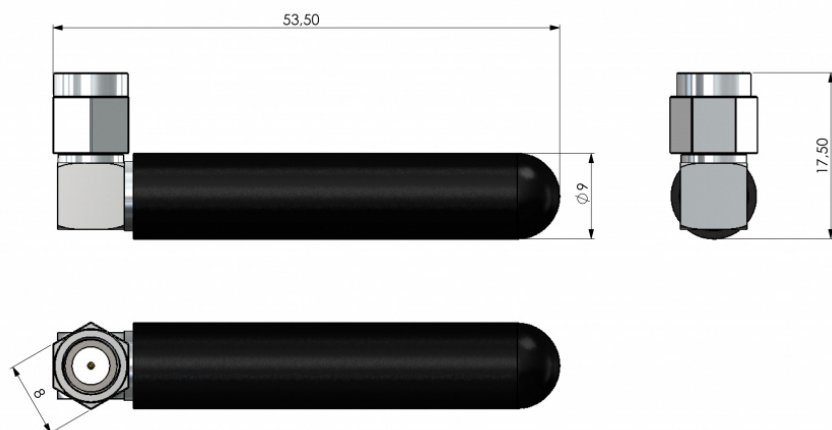

Radiation Pattern

