




View of the splitter

The splitter is CE certified. Its operating frequency range is 5-1000 MHz and the product represents good, standard parameters within its class. It is equipped with F connectors and cast aluminum housing.

### Specification

Name	Signal R-4
Code	207-959
Number of outputs	4
VHF loss [dB]	7.0

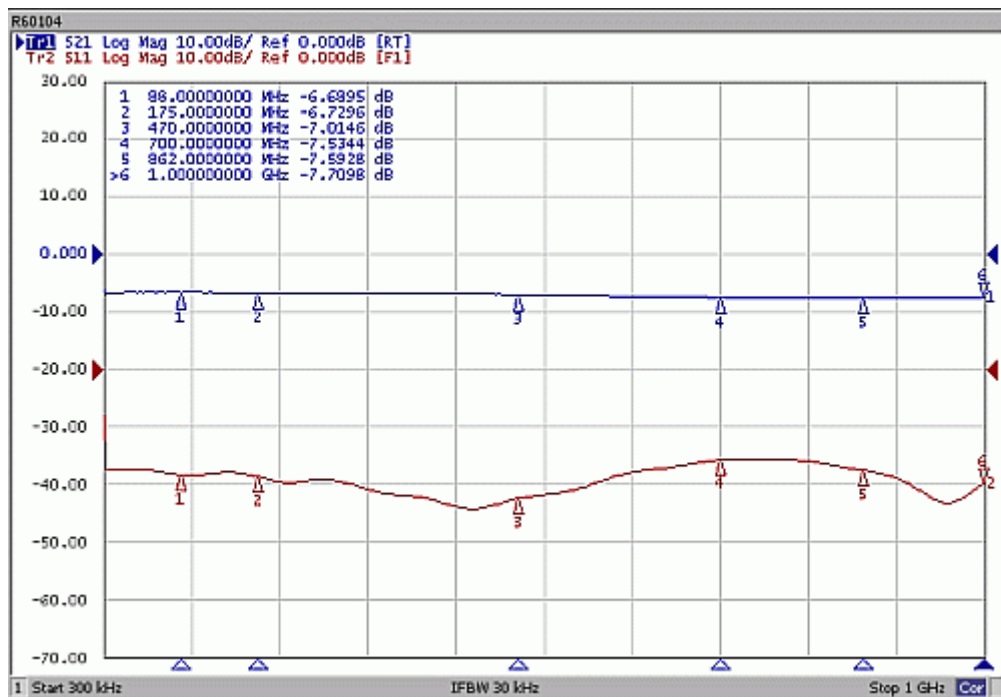

Loss and return loss diagram

