
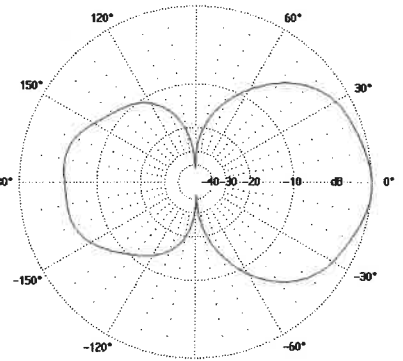



## ATEX APPROVED LOW GAIN BASE STATION ANTENNA AV1314-H-EXnA-440FN2

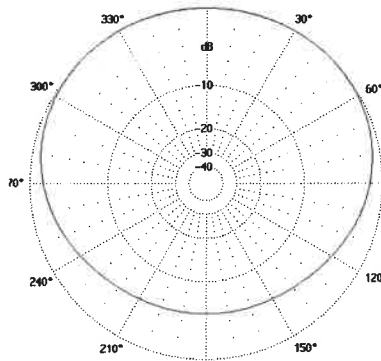

Type	AV1314-H-EXnA-440FN2
Frequency	380...470 MHz
Bandwidth	90 MHz
Impedance	50 $\Omega$ DC grounded
VSWR	1,5 typical
Polarisation	Vertical
Gain	2 dBi nominal in free space *) 4 dBi nominal at the top of a 60mm tube (L=4xdipole length) *) 4 dBi nominal at the side of a 60mm tube (L=4xdipole length) *) For other mounting configurations please contact Aerial Oy.
E-plane 3 dB beamwidth	70°
H-plane 3 dB beamwidth	200°/depending on mounting *)
Electrical downtilt	None
Front to back ratio	6 dB/depending on mounting *)
Max. continuous power	In non-ATEX environment: -500W CW, limited by input connector  In ATEX environment: -Group IIC:2,0W (33,0dBm) -Group IIB:3,5W (35,4dBm) -Group IIA:6,0W (37,7dBm) -All three EIRP-power values
RF-connector	N-female on a 1000mm fixed jumper
Operational windspeed	40 m/s (default)
Survival windspeed	55 m/s (default)
Effective wind area ( $A_{eff}$ )	0,03 m <sup>2</sup>
Dimensions (H x W x D) ( $\varnothing$ x H)	313 x 160 x 234 mm
Weight	1,7 kg antenna only, add 2 kg for standard mounting kit AETM160-6-A4
Mounting diameter	$\varnothing$ 30...115 mm pipe standard mounting kit AETM160-6-A4
Materials	AISI304 AISI316 Glass reinforced PE
Options	Mounting kit and colour
Atex marking	 II 3G, Ex nA IIA/IIB/IIC T6 Gc
Ambient temperature	-45 °C $\leq$ T <sub>amb</sub> $\leq$ +60 °C (Class T6)

\*) Limited and/or controlled when used in ATEX-environment. See related EC DECLARATION OF CONFORMITY ATEX Directive 94/9/EC, TYPE EXAMINATION CERTIFICATE, installation instruction and their attachments for more details, information and before installation and assembly.