


ROHS

ISO 9001
ISO 14001

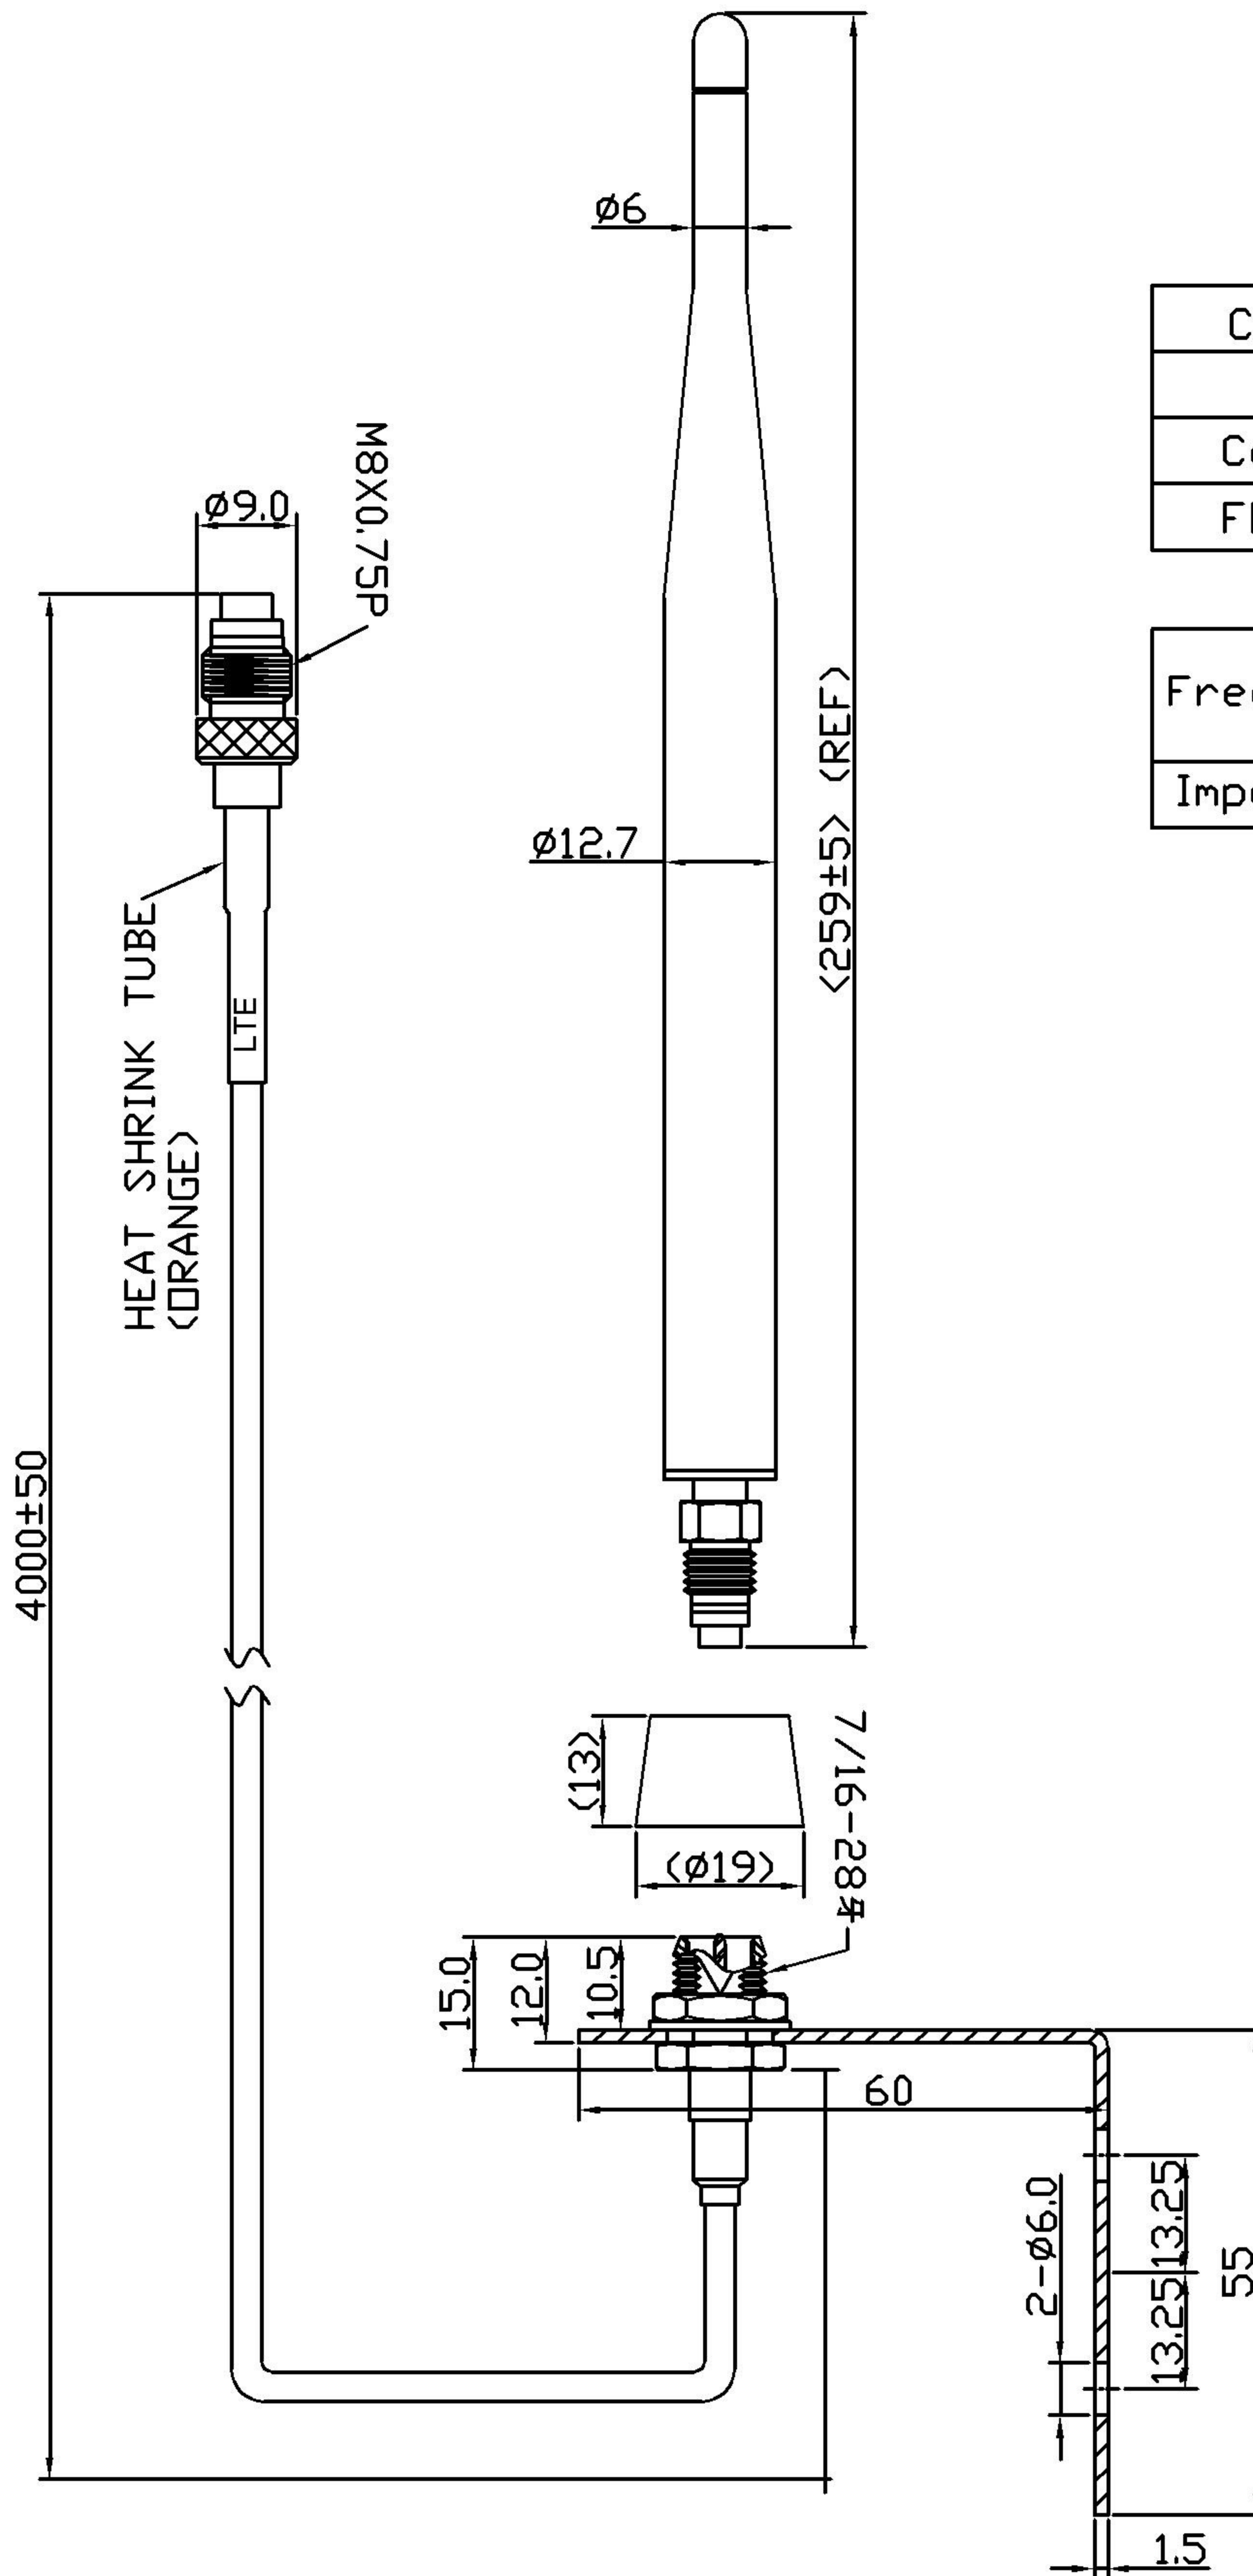

Cable	RG316/U
OD	ø2.6±0.2mm
Cover	Black
FME F	Ni

Frequency	690~960MHz
	1710~2700MHz
Impedance	50Ω

Material:		Treatment:		TRANSVOICE			
Drawer	Design	Apron	Tolerance X=±0.5 .X=±0.2 .XX=±0.1 .XXX=±0.05	Unit: mm		TITLE	LTE(FME F)ANT+ FME M+316U+FME F
				Ver: A	Scale 1:1	Part NO	
				File NO: QR0402	Drawing NO	100-27001-0234	