


| REV | DATE | DESCRIPTION | DRAWN |
|-----|----------|-------------|-------|
| △ | 05/19/20 | 已校正 | |
| | | | |

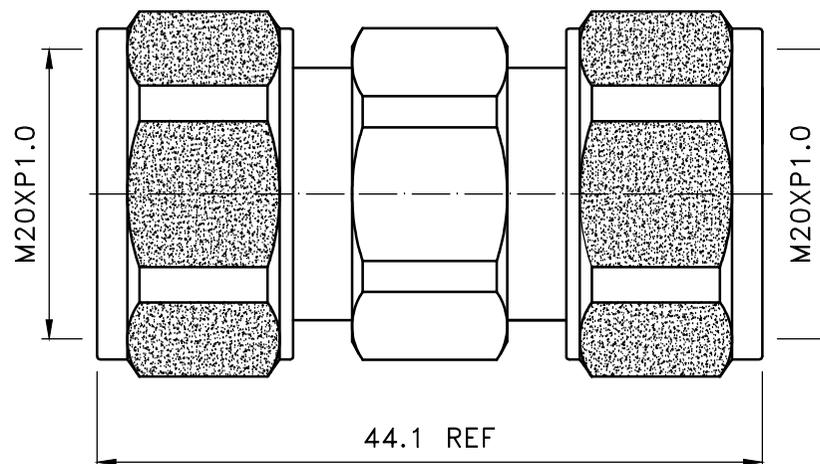

Electrical Characteristics

| | |
|--------------------------------------|-----------------|
| Impedance | 50 Ω |
| Frequency Range | DC- 6 GHz |
| PIM | < -160 dBc |
| Environmental Characteristics | |
| Operating Temperature | -55°C TO +165°C |

Prohibit re-circulating

| 7 | SHELL | BRASS | WHITE BRONZE | 2 |
|----|----------------|-----------------|--------------|------|
| 6 | GASKET | SILICONE | RED | 2 |
| 5 | RETAINING RING | STAINLESS STEEL | NONE | 1 |
| 4 | DIELECTRIC | PTFE | WHITE | 1 |
| 3 | PIN | BRASS | SILVER | 1 |
| 2 | BODY | BRASS | WHITE BRONZE | 1 |
| 1 | BODY | BRASS | WHITE BRONZE | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | Q'ty |



華耀科技有限公司
Hwa Yao Technologies co.,Ltd

| NOTE | | DIMENSION | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------|----|
| 1. STRIP ALL BURRS. 2. ALL DIMENSIONS ARE AFTER PLATING. 3. DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4. CHAMFER 1ST & LAST THREADS 45°. 5. BREAK ALL CONNERS & EDGES CO.15 MAX. | | UNLESS OTHERWISE NOTED TOLERANCES | |
| | | X=±0.3 | |
| | | 0.X=±0.2 | |
| | | 0.XX=±0.1 | |
| | | | |
| TITLE | | 4.3/1.0 MALE TO 4.3/1.0 MALE | |
| DRAWING NO. | | 4310-3014-1-TSZ | |
| APPROVED | DRAWN DATE | 05/19/20 | |
| CHECKED | SCALE | 2:1 | |
| DRAWN | UNIT | mm | SN |
| ALICE | | | |

All creative content and details belonging to HYT's confidential, and the owner, without consent, Do not posted, theft, copied and sent to a third party.